



# ECLIPSE PAINT PROTECTION FILM

## Technical Data Sheet

### General Description:


Eclipse is the flagship product of our PPF range. A product that reflects our innovation in materials technology. Made at the most advanced PPF line on the planet, Eclipse is highly impact resistant. As the only film using Triple Extrusion Technology, Eclipse is highly elastic and easy to install.

By using our proprietary HRA (Highly Repositionable Adhesive) Technology, installers no longer need to worry about stretch and lift lines.

Our patented top coat, Duracoat® 2.0, adds hydrophobic, self-healing and stain resisting abilities to create a product ready for any environmental challenge. Backed by our industry leading Limited Lifetime Warranty.

Product Thickness (Micrometer)	190 microns (± 8)
Peel Force 24H (GB/T 2792)	2250gf/in (+500)
Break Elongation % (GB/T 1040.1)	410% (±20)
Gravelometer (ASTM D3170)	Pass (No ruptures)
Outdoor Weathering Q-UV (dE*ab, 1000hr (ASTM G154-16)	< 0.5
Outdoor Weathering Q-SUN (dE*ab 1000hr)(ASTMG1544)	< 0.5

- Duracoat® 2.0
- TPU Layer
- Adhesive Layer
- Silicon PET Liner

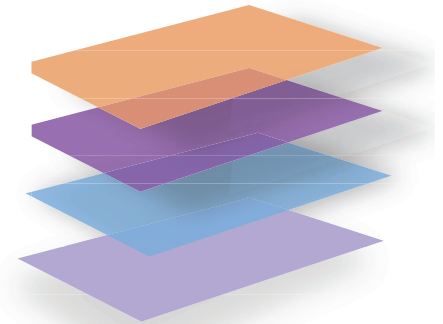

Suggested Shelf Life – 2 years from the date of purchase

Suggested Storage Conditions - 72°F (22°C) @50% RH, stored vertically

Suggested Film Handling - Always ensure film is wound tight and taped firmly in between usage

Important buyer warning: All claims, details, and suggestions are supported by the above-mentioned independent test findings. It is advised to conduct testing for suitability for intended use before using any product in any application.