

REVIVE PAINT PROTECTION FILM

Technical Data Sheet

General Description:

Nanolink Revive, our mid-level clear gloss PPF, is engineered ground up with our latest core technologies.

Revive is equipped with DURACOAT 2.0 topcoat. This gives Revive enhanced gloss, better stain resistance and durable self-healing abilities.

Our Highly Respositionable Adhesive (HRA) Technology ensures a longer working time with the film, reducing the risk of installation defects like stretch marks and lift lines.


Product Thickness (Micrometer)	175 microns (± 8)
Peel Force 24H (GB/T 2792)	1688 gf/in (+500)
Break Elongation % (GB/T 1040.1)	310% (±20)
Gravelometer (ASTM D3170)	Pass (No ruptures)
Outdoor Weathering Q-UV (dE*ab, 1000hr (ASTM G154-16)	< 0.3
Outdoor Weathering Q-SUN (dE*ab 1000hr)(ASTMG1544)	< 0.3

Duracoat®2.0

TPU Layer

Adhesive Layer

Silicon PET Liner

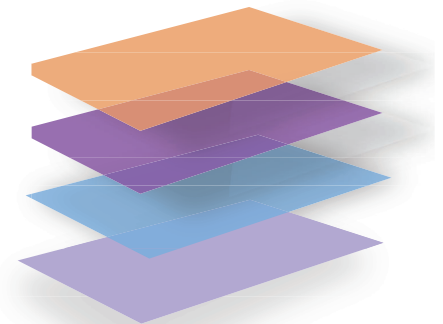

Suggested Shelf Life – 2 years from the date of purchase

Suggested Storage Conditions - 72°F (22°C) @50% RH, stored vertically

Suggested Film Handling - Always ensure film is wound tight and taped firmly in between usage

Important buyer warning: All claims, details, and suggestions are supported by the above-mentioned independent test findings. It is advised to conduct testing for suitability for intended use before using any product in any application.