

## SATIN - MATT LOOK PAINT PROTECTION FILM

### Technical Data Sheet

#### General Description:

Satin helps you replicate the factory matt paint finish with a classic satin sheen.

Made of premium Aliphatic Polycaprolactone TPU (PCL), Satin is the perfect choice for installers looking to combine protection with an element of style. High quality materials ensure great stretchability and easy folding of edges and corners.

By using our proprietary HRA (Highly Repositionable Adhesive) Technology, installers no longer need to worry about stretch and lift lines.

Our patented top coat, Duracoat® 2.0, adds hydrophobic, self-healing and stain resisting abilities to create a product ready for any environmental challenge. Backed by our industry leading 10 Years Warranty.

Product Thickness (Micrometer)	190 microns (± 8)
-----------------------------------	-------------------

Peel Force 24H (GB/T 2792)	2250gf/in (+500)
----------------------------	------------------

Break Elongation % (GB/T 1040.1)	320% (±20)
-------------------------------------	------------

Gravelometer (ASTM D3170)	Pass (No ruptures)
------------------------------	--------------------

Outdoor Weathering Q-UV (dE*ab, 1000hr (ASTM G154-16)	< 0.5
---	-------

Outdoor Weathering Q-SUN (dE*ab 1000hr)(ASTMG1544)	< 0.5
--	-------


Protective Film

Duracoat®2.0

TPU Layer

Adhesive Layer

Silicon PET Liner

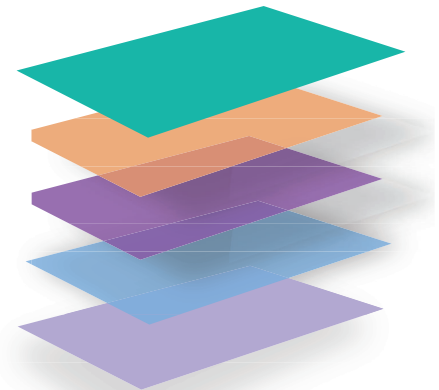

Suggested Shelf Life – 2 years from the date of purchase

Suggested Storage Conditions - 72°F (22°C) @50% RH, stored vertically

Suggested Film Handling - Always ensure film is wound tight and taped firmly in between usage

Important buyer warning: All claims, details, and suggestions are supported by the above-mentioned independent test findings. It is advised to conduct testing for suitability for intended use before using any product in any application.